

Body Size

1/2"

Multi-Couplings

MACH 2-Series




Technical Performance Data

Body Size inch	Temperatur Range	Maximum operating pressure
1/2"	-30°C up to +110°C	250 bar


Connecting box (Coupling Plate)

Complete unit including the base connector unit, its dust cover, a lever acting as a central locking device and 2 female couplings.



Plug Plate

Complete unit including the connecting plug and 2 male tips, which meet the requirements of ISO 7241-1-A.



Technical Description

The couplings meet requirements of ISO 7241-1 Series A. Possibility to connect 2 hydraulic lines simultaneously. No coupling misconnection or accidental disconnection. Possibility of connecting under pressure up to 250 bar in one hydraulic line only.

Advantages

Central came locking system. Poppet style valving with a molded shaped seal to prevent seal washout at high flow rates.

Applications

- Agricultural (front loaders, hedge cutters,...)
- Road service vehicles (road systems lorries, road sweepers, snowploughs,...)
- Industrial Applications


Working Pressure

max. 250 bar

Working Temperature

-30°C up to +110°C (NBR) depending on the medium.

Flow Capacity with Oil with Viscosity of 43cSt at 38°C as per ISO 7241/2-2000




Material

Protective Cap	Thermoplastic
Quick Connect Couplings/-Plugs	Steel
Seals	NBR
Locking Mechanism	Steel
Casting Boxes	Steel

Installation


Mechanical attachment: 2 mounting holes Ø 8,5 mm

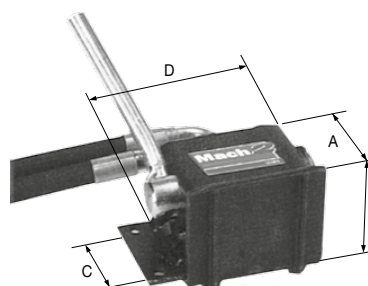

	1/2"
A	100 mm
B	80 mm
C	55 mm
D	125 mm


Coupling Plate

MACH2-Series

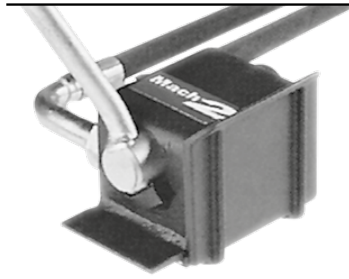	End Configuration	Coupling (2 pcs.)	Top Casting (1 pc.)	Weight gr.	Part Number
	M 22 x 1,5 - DIN2353-15L	1/2"	1/2"	2723	MACH2-IA-B
Other types of MACH 2 with non-spill connections are also available on request.					
Please consult us for further information.					

Plug Plate

MACH2-Series

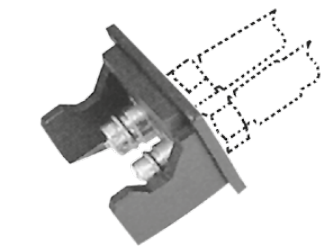	End Configuration	Coupling (2 pcs.)	Top Casting (1 pc.)	Weight gr.	Part Number
	M 22 x 1,5 - DIN2353-15L	1/2"	1/2"	1203	MACH2-IA-P

Spare Parts

	Description	Part Number
	Coupling seal	JT020117N0552
	Coupling	LV54D6X5MLXC
	Plug	LV14E6X5MLX

⚠ Please consider our security advices on the pages 12/13 ⚠