




EO-3®-Tube fittings

W EO-3® Union elbow

X1) O-ring
X2) Indication-ring
T1 = Special thread
characteristic-Ø

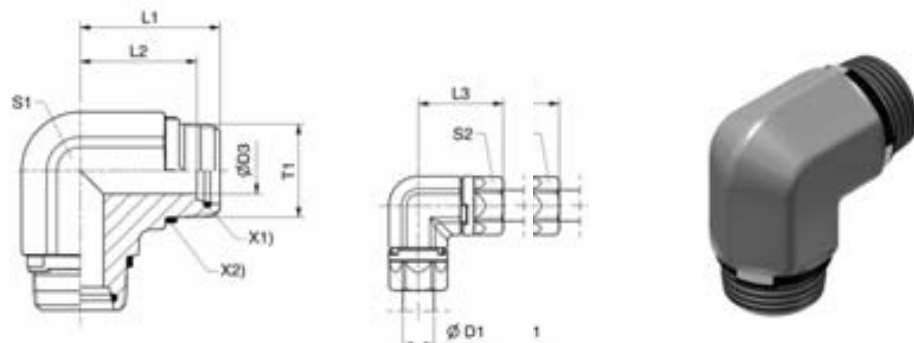

D1	D3	T1	L1	L2	L3	S1	S2	Weight g/1 piece	Order code*	PN
6	4	11.5	21.5	17	26.5	13	14	36	W06P3OMDCF	420
8	6	14.5	25.5	20.5	31.5	14	17	54	W08P3OMDCF	420
10	8	16.5	25	20	31.5	19	19	81	W10P3OMDCF	420
12	10	19	29	24	35.5	19	22	97	W12P3OMDCF	420
15	12	24	36	31	44	27	27	236	W15P3OMDCF	420
16	12	24	36	30	44	27	27	235	W16P3OMDCF	420
18	15	26	39	33	47	27	30	242	W18P3OMDCF	420
20	16	29.5	42	36	51.5	33	32	385	W20P3OMDCF	420
22	18	29.5	38	32	46.5	33	32	333	W22P3OMDCF	250
25	20	37	49	42	59	41	41	706	W25P3OMDCF	420
28	24	37	45	38	53.5	41	41	575	W28P3OMDCF	250
30	25	43.5	55.5	47.5	67.5	48	50	1075	W30P3OMDCF	420
35	30	45	51.5	43.5	61.5	48	50	873	W35P3OMDCF	250
38	32	52	60	51	73	50	60	1170	W38P3OMDCF	420
42	36	52	56	48	66	50	60	925	W42P3OMDCF	250

$\frac{PN \text{ (bar)}}{10} = PN \text{ (MPa)}$

Delivery without nuts

* Please add the **suffixes** below according to the sealing material required

NBR = Standard, no suffix required

FKM = on request

