




EO-3®-Tube fittings

GE-M-ED Male stud EO-3® connector

Male metric thread - ED (ISO 9974)

X1) O-ring
X2) Indication-ring
X3) Elastosealing ED
T1 = Special thread
characteristic-Ø

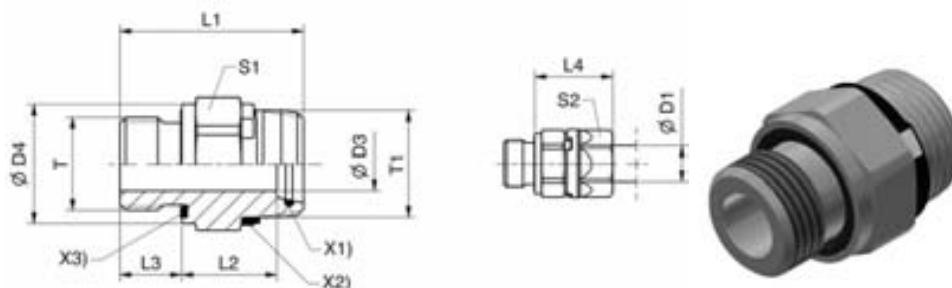

D1	T	D3	D4	T1	L1	L2	L3	L4	S1	S2	Weight g/1 piece	Order code*	PN
6	M10X1	4	14	11.5	25	12.5	8	22	14	14	18	GE06P3MEDOMDCF	420
8	M12X1.5	6	17	14.5	30	13	12	24	17	17	28	GE08P3MEDOMDCF	420
10	M14X1.5	8	19	16.5	31	14	12	25.5	19	19	38	GE10P3MEDOMDCF	420
12	M16X1.5	9	22	19	33	16	12	27.5	22	22	52	GE12P3MEDOMDCF	420
12	M14X1.5	7	19	19	33	16	12	27.5	22	22	50	GE12P3M14X1.5EDOMDCF	420
12	M18X1.5	10	24	19	34.5	17.5	12	29.0	24	22	65	GE12P3M18X1.5EDOMDCF	420
12	M22X1.5	10	27	19	38	21	12	32.5	27	22	100	GE12P3M22X1.5EDOMDCF	420
15	M18X1.5	11	24	24	39	22	12	35	24	27	94	GE15P3MEDOMDCF	420
15	M16X1.5	9	22	24	38.5	21.5	12	34.5	27	27	91	GE15P3M16X1.5EDOMDCF	420
15	M22X1.5	12	27	24	41.5	22.5	14	35.5	27	27	110	GE15P3M22X1.5EDOMDCF	420
16	M22X1.5	12	27	24	41.5	21.5	14	35.5	27	27	108	GE16P3MEDOMDCF	420
18	M22X1.5	12	27	26	42.5	22.5	14	36.5	30	30	124	GE18P3MEDOMDCF	420
20	M27X2	16	32	29.5	47.5	25.5	16	41	32	32	168	GE20P3MEDOMDCF	420
22	M26X1.5	18	32	29.5	43.5	21.5	16	36	32	32	135	GE22P3MEDOMDCF	250
25	M33X2	20	40	37	54	29	18	46	41	41	307	GE25P3MEDOMDCF	420
28	M33X2	23	40	37	50	25	18	40.5	41	41	243	GE28P3MEDOMDCF	420
30	M42X2	25	50	43.5	60	32	20	52	50	50	514	GE30P3MEDOMDCF	420
35	M42X2	30	50	45	56	28	20	46	50	50	401	GE35P3MEDOMDCF	250
38	M48X2	32	55	52	64	33	22	55	55	60	618	GE38P3MEDOMDCF	420
42	M48X2	36	55	52	61	31	22	49	55	60	496	GE42P3MEDOMDCF	250

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Delivery without nut

* Please add the **suffixes** below according to the sealing material required

NBR = Standard, no suffix required

FKM = on request

