


Parflange® F37 – SAE 1000/ISO 6162-1 footprint

TFV – Flare flange connection

Tube to port connection

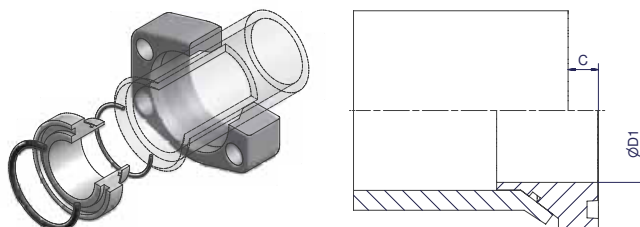

Size Inch	Tube	Flange incl. Insert F37 Seal + O-Ring Order code	D1	C	Insert incl. 2 x O-Ring Order code	O-Ring Tube Side Order code	O-Ring Seal Port Side Order code	Weight (Steel) kg/1 piece
1 1/2	50X3.0	F37-124-50X3.0TFVCF	36.0	11	IN24-50X3.0TFVCF	OR44.17X1.78X	OR47.22X3.53	0.72
2	60X3.0	F37-132-60X3.0TFVCF	46.0	12	IN32-60X3.0TFVCF	OR53.7X1.78X	OR56.75X3.53	1.10
2 1/2	75X3.0	F37-140-75X3.0TFVCF	60.0	10	IN40-75X3.0TFVCF	OR69.57X1.78X	OR69.44X3.53	1.46
3	90X3.5	F37-148-90X3.5TFVCF	72.0	15	IN48-90X3.5TFVCF	OR82.27X1.78X	OR85.32X3.53	2.17
3 1/2	100x4.0	F37-156-100X4.0TFVCF	88.6	15	IN56-100X4.0TFVCF	OR98.02X3.53	OR98.02X3.53	2.60
4	115X4.0	F37-164-115X4.0TFVCF	90.0	14	IN64-115X4.0TFVCF	OR110X2X	OR110.72X3.53	3.53
5	140X4.5	F37-180-140X4.5TFVCF	122.0	15	IN80-140X4.5TFVCF	OR129.77X3.53	OR136.12X3.53	4.09
6	165X5.0	F37-196-165X5.0TFVCF	150.8	17	IN96-165X5.0TFVCF	OR158.42X6.26X	OR158.34X3.53	6.98

Other sizes on request

Please change suffixes according to material/surface required

Order code suffixes		
Material	Suffix surface and material	Example
Steel, zinc plated, Cr(VI)-free	CF	F37-124-50X3.0TFVCF
Stainless steel	SS	F37-124-50X3.0TFVSS

ENGINEERING YOUR SUCCESS.