
Brass Compression Fittings

0119 Double Banjo with Captive Sealing Washer, Male BSPP Thread



Brass, technical polymer




ØD	C		F	F1	H	H1	L1	L/2	N	kg
4	G1/8	0119 04 10	14	10	24	9.5	14.5	24	17.5	0.049
6	G1/8	0119 06 10	14	13	24	9.5	14.5	25	17.5	0.056
	G1/4	0119 06 13	17	13	25	10	16	26.5	21	0.038
8	G1/8	0119 08 10	14	14	24	9.5	15.5	28	17.5	0.069
	G1/4	0119 08 13	17	14	25	10	15.5	28	21	0.074
	G3/8	0119 08 17	22	14	32	13	18	30.5	26.5	0.140
10	G1/4	0119 10 13	17	19	31	13	19	34	23	0.156
	G3/8	0119 10 17	22	19	32	13	19	34	26.5	0.165
12	G1/4	0119 12 13	17	22	34	14.5	19	34	23	0.180
	G3/8	0119 12 17	22	22	35	14.5	19	34	26.5	0.182
14	G1/4	0119 14 13	17	24	37	16	20.5	37.5	28	0.246
	G3/8	0119 14 17	22	24	38	16	20.5	37.5	28	0.247
	G1/2	0119 14 21	27	24	40	16	20.5	38	32.5	0.219

Thread with pre-assembled washer
Sealing washers 0602 can be found in Chapter 9.

0119..39 Double Banjo with Bi-Material Seal, Male BSPP Thread



Brass, zinc-plated steel with NBR seal

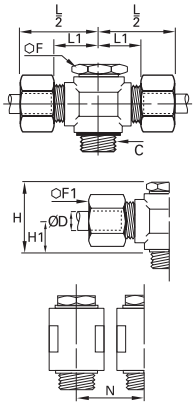

ØD	C		F	F1	H	H1	L1	L/2	N	kg
4	G1/8	0119 04 10 39	14	10	23	9.5	14.5	24	17.5	0.050
5	G1/8	0119 05 10 39	14	12	23	9.5	14.5	25	17.5	0.049
	G1/4	0119 05 13 39	17	12	24	10	126	26	21	0.072
6	G1/8	0119 06 10 39	14	13	23	9.5	14.5	25	17.5	0.056
	G1/4	0119 06 13 39	17	13	24	10	16	26	21	0.071
8	G1/8	0119 08 10 39	14	14	23	9.5	15.5	28	17.5	0.072
	G1/4	0119 08 13 39	17	14	24	10	15.5	28	21	0.080
	G3/8	0119 08 17 39	22	14	31.5	13.5	18	30	26.5	0.118
10	G1/4	0119 10 13 39	17	19	30	13	19	34	23	0.156
	G3/8	0119 10 17 39	22	19	31.5	13.5	19	34	26.5	0.167
12	G1/4	0119 12 13 39	17	22	33	14.5	19	34	23	0.180
	G3/8	0119 12 17 39	22	22	34.5	15	19	34	26.5	0.183
14	G1/4	0119 14 13 39	17	24	36	16	20.5	37	28	0.248
	G3/8	0119 14 17 39	22	24	37.5	16.5	20.5	37	28	0.247
	G1/2	0119 14 21 39	27	24	39	16.5	20.5	38	32.5	0.262
15	G3/8	0119 15 17 39	22	24	37.5	16.5	20.5	37	28	0.246
	G1/2	0119 15 21 39	27	24	40	16.5	20.5	38	32.5	0.251
18	G1/2	0119 18 21 39	27	30	47	20	24.5	43	36	0.469
20	G3/4	0119 20 27 39	32	32	50	20.5	24.5	44	39	0.638
22	G3/4	0119 22 27 39	32	36	54	22.5	24.5	45	39	0.610

Thread with pre-assembled washer
Bi-material sealing washers, part number 0139, can be found in Chapter 9.

Brass Compression Fittings

These **"universal"** fittings provide users with **numerous connection** options for a wide variety of tube materials without the need for tube threading or soldering. This range **guarantees** excellent long-term sealing and performance.

Product Advantages

Simple to Install and Use

- Suitable for pneumatic and medium pressure hydraulic applications
- Compatible with many industrial fluids
- Large product range: 22 configurations
- Excellent sealing due to the tightening of the olive onto the tube
- Metallic sealing guarantees maximum service life
- High strength brass for increased mechanical reliability

Wide Variety of Tubing

- Connection of different types of tubing and hose: metal, polymer, steel, rubber, etc.
- Multiple tube diameters can be connected using the Parker Legris reducer assembly system
- No insert required for rigid and semi-rigid polyamide tubing below 14 mm



Applications


Pneumatics
Cooling
Automotive Process
Lubrication
Fluid Transmission
Packaging
Industrial Machinery

Technical Characteristics

Compatible Fluids	Water, machining oil, fuel, hydraulic oil, compressed air, chemical fluids, disinfectants
Working Pressure	Vacuum to 550 bar
Working Temperature	-40°C to +250°C
Tightening Torque	See "Technical Characteristics" on opposite page

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.
Guaranteed for use with a vacuum of 755 mm Hg (99% vacuum).

Component Materials

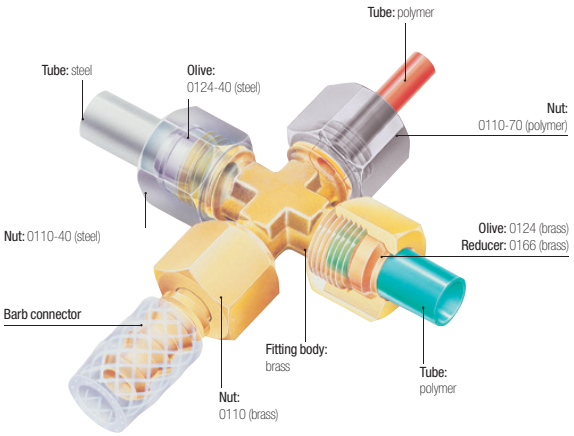

Silicone-free

Maximum Bore Diameters

The table below shows the recommended compatibility of tube size, BSPP male thread and maximum bore.

Tube O.D.	BSPP Thread	Max. Bore
4-5-6	G1/8	4
6-8-10	G1/4	7
10-12-14	G3/8	11
14-15-16-18	G1/2	14
18-20-22	G3/4	18
22-25-28	G1	24

Tube Length for Assembly

Minimum length of tube (L) between 2 fittings.



ØD	L (mm)	ØD	L (mm)	ØD	L (mm)
4	26.5	12	39	20	51
5	26	14	41	22	54
6	26	15	41	25	62
8	32	16	46.5	28	62
10	39	18	49.5		

Regulations

CNOMO: E07.21.115N
(for robotic equipment in the automotive industry)
DI: 97/23/EC (PED)
RG: 1907/2006 (REACH)
DI: 2002/95/EC (RoHS)
DI: 94/9/EC (ATEX)

Technical Characteristics

Installing Compression Fittings

Cutting the Tube



Cut the polymer or metal tube square.

Preparing the Connection




For metal tubing, de-burr the tube prior to connection. Tube bending should be done before connection.



Slide the nut onto the tube; lubricate the threads on the body and nut along with the olive to facilitate tightening (for metal tubing as well). Fit the olive onto the end of the tube.

Connecting the Tube




Push the tube up against the shoulder of the body of the fitting and hand tighten.

Final Assembly




Tighten the nut using a spanner or torque wrench to enable the olive to bite on the tube, the connection being completed when the recommended tightening torque is reached (see tables below).




It is recommended to use an insert in order to prevent tube creeping (diameter > 14mm)

Recommended Nut Tightening Torque

Tightening torque in daN.m =
maximum tightening torque of a 0110 nut and 0124 olive with copper, brass or steel tube.



Nut 0110 and 0110..40



Nut 0110..60

Ø D (mm)	⬡ F 0110	⬡ F 0110..60	Max. daN.m Copper or Brass	⬡ F 0110..40	Max. daN.m Steel
4	10	11	0.7	10	1.5
5	12	13	0.7	12	1.5
6	13	13	1.5	13	2.5
8	14	16	1.5	14	2.5
10	19	20	1.8	19	3
12	22	22	3	22	4.5
14	24	24	3.5	24	5.5
15	24	24	4	24	6
16	27	27	5	27	7
18	30	30	6	30	9
20	32	32	6	32	10
22	36	36	7	36	12
25	41	41	8	41	13
28	42		9		

Customised Fittings

Working directly with its customers and based on its knowledge and experience, Parker Legris can design customised brass compression fittings for specific requirements using the customer's specifications.

The range of compression fittings also offers nickel chemical surface treatment in order to improve the corrosion resistance and chemical compatibility of the fittings (the model number of the fitting is then given the suffix 99).



The above recommendations are given in good faith. However, since each application is different, it is advisable to undertake tests in actual working conditions.

Technical Characteristics

The use of Parker Legris brass compression fittings is dependant on the tube material.
Tables of recommended working pressure for the different tubes are shown below.

Recommended Tube Type

Copper tube: copper which has been "cold rolled", cold drawn and in straight lengths.
Brass tube: in cold-rolled straight lengths (same working pressure as for copper tube).
"Coiled annealed" copper tube: reduces working pressure by 35%; must be avoided completely if vibration is present.

Steel tube: "thin wall" cold drawn, seamless, bright annealed and in straight lengths.
6 mm to 16 mm O.D.: max. wall thickness 1 mm
Above 16 mm O.D.: max. wall thickness 1.5 mm

Polyamide tube: semi-rigid
For rigid polyamide tube, multiply the figures in this table by 1.8.


Recommended Tube-Fitting Assembly Configurations

Assembled using Parker Legris brass olive and nut.


Assembled using Parker Legris steel olive and nut (nut type 0110..40).

Assembled using Parker Legris brass olive and nut.


Copper Tube
Maximum Working Pressure (bar)

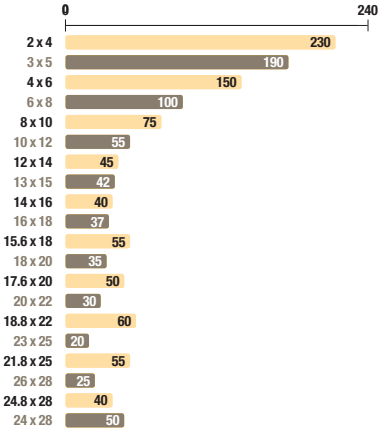

Steel Tube
Maximum Working Pressure (bar)

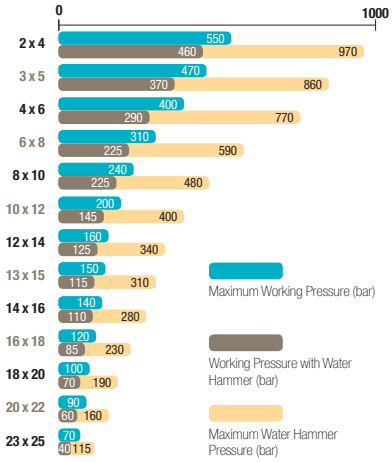

Parker Legris Semi-Rigid Polyamide Tube
Maximum Working Pressure (bar)

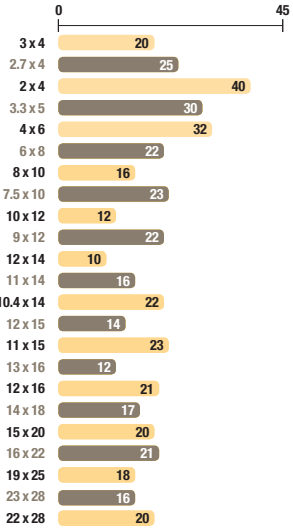

When using a plastic nut type 0110..70, the maximum working pressure is 10 bar, for all diameters.

Working Pressure Coefficients for Semi-Rigid Polyamide Tubing

Temperature °C	-40°C / -15°C	-15°C / +30°C	+30°C / +50°C	+50°C /+70°C	+70°C /+100°C
Factor	1.8	1	0.68	0.55	0.31

Parker Legris brass compression fittings are not compatible with ammonia and its derivatives.

The above recommendations are given in good faith. However, since each application is different, it is advisable to undertake tests in actual working conditions.

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark

Compression Fittings

Brass Compression Fittings
(P. 5-5)



Fluids: compressed air, non-corrosive industrial fluids
Materials: forged or machined brass
Pressure: 550 bar
Temperature: -40°C to +250°C
Ø metric: 4 mm to 28 mm

Stainless Steel Compression Fittings
(P. 5-31)



Fluids: compressed air, coolants, industrial and corrosive fluids
Materials: 316L stainless steel
Pressure: 400 bar
Temperature: -40°C to +250°C
Ø metric: 6 mm to 16 mm

PL Nickel-Plated Brass Spigot Fittings
(P. 5-41)



Fluids: compressed air, compatible industrial fluids
Materials: forged or machined nickel-plated brass
Pressure: 40 bar
Temperature: -40°C to +100°C
Ø metric: 4 mm to 14 mm

Compression Fitting Part Numbers

0105 14 27 99

Item Type
01XX: brass
18XX: stainless steel

Ø
04 = 4 mm
06 = 6 mm
...
20 = 20 mm
28 = 28 mm

Thread
10 = 1/8
13 = 1/4
...
21 = 1/2
27 = 3/4

Suffix
39: bonded seal
40: treated steel
60: nut
70: polymer nut
99: chemical nickel

PL Fitting Part Numbers

F3BPL 8/10 -1/4

Item Type
FBPL
F3BPL
HBPL
WBPL
...

Ø
2.7/4
4/6
6/8
7.5/10
8/10
10/12
11/14

Thread
BSPT & NPT:
1/8
1/4
3/8
...
Metric:
M10
M12