


# Compact Regulators with External Adjustment

**7066**

Compact Flow Regulator Supply, Male BSPT Thread



Technical polymer, nickel-plated brass, NBR



ØD	C		F	F1	H <sub>min</sub>	H <sub>max</sub>	H1	L	L1	ØT	kg
10	R1/4	<a href="#">7066 10 13</a>	17	23	43.5	51.5	18	31.5	12.5	17	0.020
	R3/8	<a href="#">7066 10 17</a>	17	23	43.5	51.5	18	31.5	12.5	17	0.020
	R1/2	<a href="#">7066 10 21</a>	17	23	43.5	51.5	18	31.5	12.5	17	0.059
12	R1/4	<a href="#">7066 12 13</a>	17	23	43.5	51.5	18	35	12.5	17	0.056
	R3/8	<a href="#">7066 12 17</a>	17	23	43.5	51.5	18	35	12.5	17	0.059
	R1/2	<a href="#">7066 12 21</a>	17	23	43.5	51.5	18	35	12.5	17	0.064

Pre-coated thread

Flow Control Regulators

Function Fittings

# Flow Control Regulators

Parker Legris flow control regulators with polymer, nickel-plated brass or aluminium bodies, external or recessed adjustment screws, offer **precise adjustment, accuracy** and **compactness** providing the solution for all applications.

## Product Advantages

### Improved Productivity

- Higher maximum flow than standard regulators
- Full flow with minimum pressure drop (model 7060)
- Optimal control of the cylinder rod speed
- 100% leak-tested in production
- Date coding to guarantee quality and traceability
- Reduce compressed air and energy consumption

### Accuracy & Performance

- Precise adjustment for accurate flow regulation from initial to maximum opening
- Constant cylinder rod displacement speed
- Long-term stability of flow
- Reduced weight (polymer version)
- Mechanical strength and corrosion resistance with nickel-plated brass version

### Ergonomics & Large Range

- External adjustment screw: easy to adjust without tooling and lockable
- Recessed adjustment screw: more compact and protects the adjustment mechanism
- Uni-directional: exhaust or inlet
- Bi-directional: adjustment of air flow in both directions
- 360° positioning
- NPT version on request



Pneumatics  
Robotics  
Semi-Conductors  
Textile  
Automotive Process  
Packaging

Applications


## Technical Characteristics

Compatible Fluids	Compressed air Other fluids: contact us					
Working Pressure	1 to 10 bar					
Working Temperature	0°C to +70°C					

Max. Tightening Torques (external adjustment screw)	Threads	M3 x0.5	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	0.06	0.16	0.8	1.2	3	3.5
Max. Tightening Torques (recessed adjustment screw)	Threads	—	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	—	0.1	0.4	0.5	0.6	0.7

You will find all the flow rate characteristic curves (to 6 bar) for flow control regulators at the end of the chapter.

### Component Materials

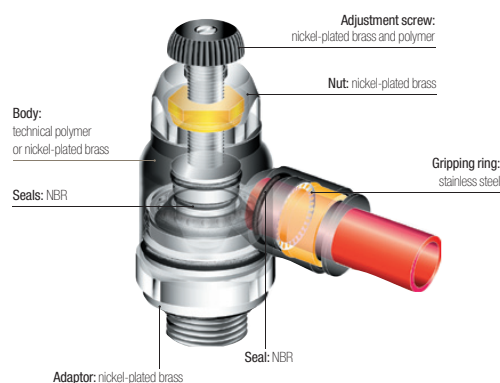

Silicone-free

# Flow Control Regulators

## Operation

Parker Legris offers both uni-directional and bi-directional flow control regulators.

The uni-directional models control the flow of air in one direction through an adjustable restrictor, while allowing full flow in the opposite direction.

The bi-directional models control the flow of air in both directions.


A more precise and constant flow regulation is obtained when the regulator is fitted directly onto the cylinder.

### Models with Recessed Adjustment


#### Uni-Directional (Exhaust Version)



#### Uni-Directional (Supply Version)

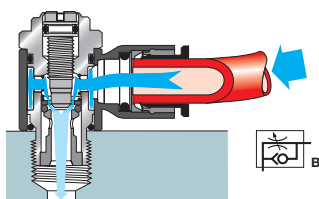

#### Bi-Directional Version

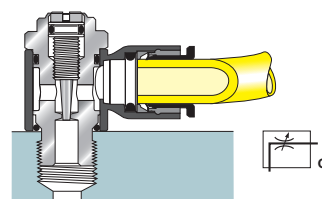


### Models with External Adjustment


#### Uni-Directional (Exhaust Version)



#### Uni-Directional (Supply Version)




#### Bi-Directional Version

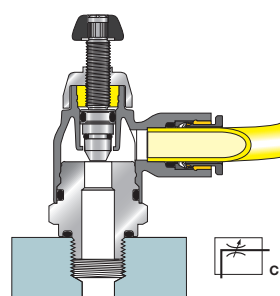


### In-Line Models

#### Uni-Directional Version

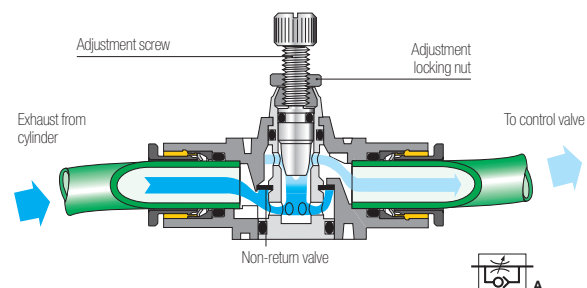

#### Bi-Directional Version

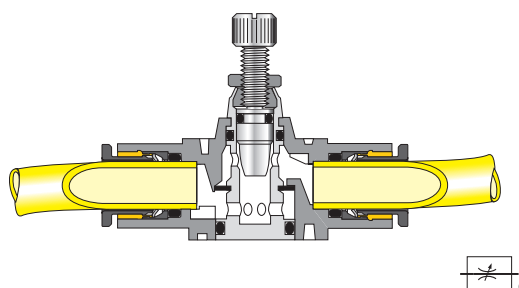

For instant visual identification, each Parker Legris flow control regulator version is identified by the related pneumatic symbol and by a letter:

- uni-directional regulation on exhaust: letter A
- uni-directional regulation on supply: letter B
- bi-directional regulation: letter C


# Flow Characteristics (at 6 bar)

## for Flow Control Regulators




**7065**  
**7066**  
**7067**

### 7065

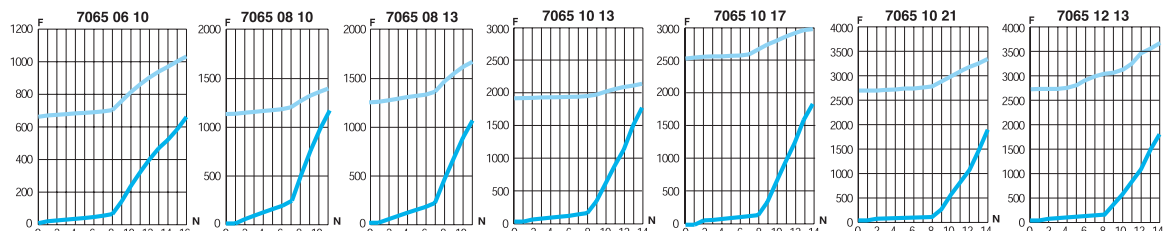

### 7066

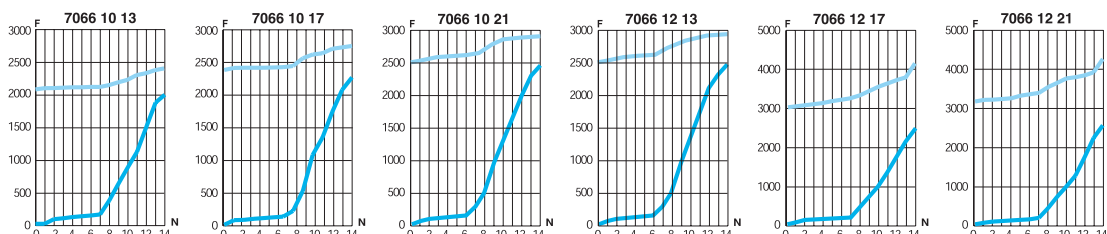

### 7067


Flow characteristics for model 7067:

- exhaust version: see model 7065, direction of adjustment
- supply version: see model 7066, direction of adjustment




**7665**  
**7668**

### 7665

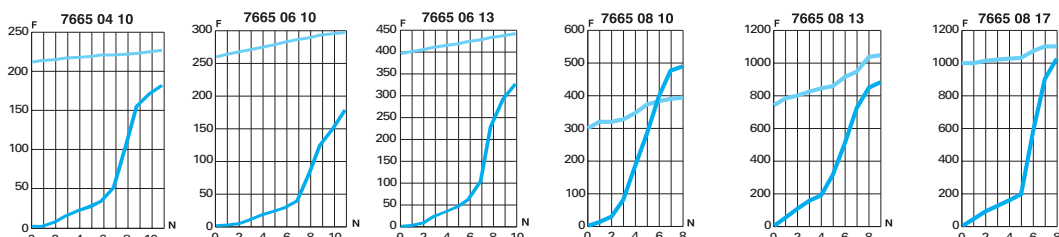

### 7668

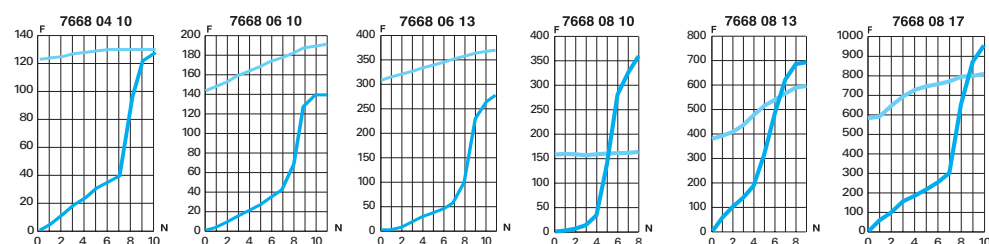

Flow Control Regulators

Function Fittings