


Metal Regulators with External Adjustment

7100

Compact Flow Regulator, Exhaust, Male BSPP Thread



Nickel-plated brass, NBR



ØD	C		F	F1	H min	H max	H1	L	kg
4	G1/8	7100 04 10	10	19	47	53	23	21	0.078
6	G1/8	7100 06 10	10	19	47	53	23	24.5	0.080
	G1/4	7100 06 13	10	19	47.5	53	23.5	24.5	0.083
8	G1/8	7100 08 10	14	19	50	55	24.5	29	0.097
	G1/4	7100 08 13	14	19	50	56	25	29	0.100
10	G3/8	7100 08 17	17	25	56	62	27	30.5	0.154
	G1/4	7100 10 13	14	19	50	56	25	35	0.103
12	G3/8	7100 10 17	17	25	56	62	27	35	0.157
	G1/2	7100 12 17	17	25	56	62	27	38	0.198
14	G1/2	7100 12 21	17	25	55	62	27	38	0.207
	G1/2	7100 14 21	17	25	55	62	27	41	0.205

Flow Control Regulators

Parker Legris flow control regulators with polymer, nickel-plated brass or aluminium bodies, external or recessed adjustment screws, offer **precise adjustment, accuracy** and **compactness** providing the solution for all applications.

Product Advantages

Improved Productivity

- Higher maximum flow than standard regulators
- Full flow with minimum pressure drop (model 7060)
- Optimal control of the cylinder rod speed
- 100% leak-tested in production
- Date coding to guarantee quality and traceability
- Reduce compressed air and energy consumption

Accuracy & Performance

- Precise adjustment for accurate flow regulation from initial to maximum opening
- Constant cylinder rod displacement speed
- Long-term stability of flow
- Reduced weight (polymer version)
- Mechanical strength and corrosion resistance with nickel-plated brass version

Ergonomics & Large Range

- External adjustment screw: easy to adjust without tooling and lockable
- Recessed adjustment screw: more compact and protects the adjustment mechanism
- Uni-directional: exhaust or inlet
- Bi-directional: adjustment of air flow in both directions
- 360° positioning
- NPT version on request



Pneumatics
Robotics
Semi-Conductors
Textile
Automotive Process
Packaging

Applications


Technical Characteristics

Compatible Fluids	Compressed air Other fluids: contact us					
Working Pressure	1 to 10 bar					
Working Temperature	0°C to +70°C					

Max. Tightening Torques (external adjustment screw)	Threads	M3 x0.5	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	0.06	0.16	0.8	1.2	3	3.5
Max. Tightening Torques (recessed adjustment screw)	Threads	—	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	—	0.1	0.4	0.5	0.6	0.7

You will find all the flow rate characteristic curves (to 6 bar) for flow control regulators at the end of the chapter.

Component Materials

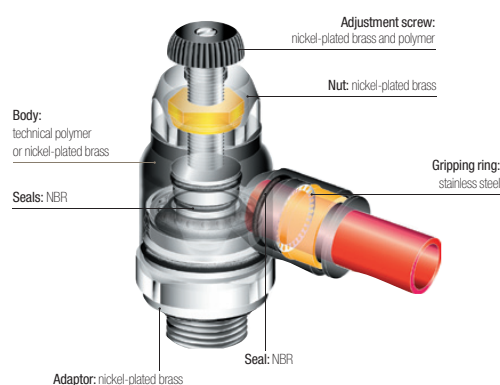

Silicone-free

Flow Control Regulators

Operation

Parker Legris offers both uni-directional and bi-directional flow control regulators.

The uni-directional models control the flow of air in one direction through an adjustable restrictor, while allowing full flow in the opposite direction.

The bi-directional models control the flow of air in both directions.


A more precise and constant flow regulation is obtained when the regulator is fitted directly onto the cylinder.

Models with Recessed Adjustment


Uni-Directional (Exhaust Version)



Uni-Directional (Supply Version)

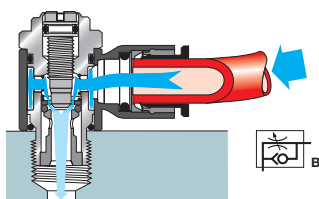

Bi-Directional Version

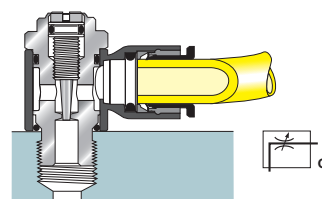


Models with External Adjustment


Uni-Directional (Exhaust Version)



Uni-Directional (Supply Version)




Bi-Directional Version

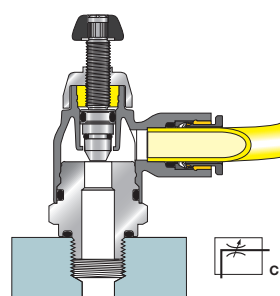


In-Line Models

Uni-Directional Version

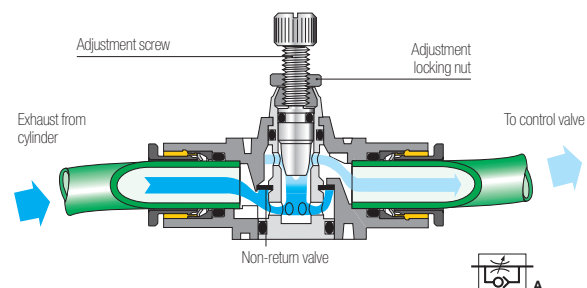

Bi-Directional Version

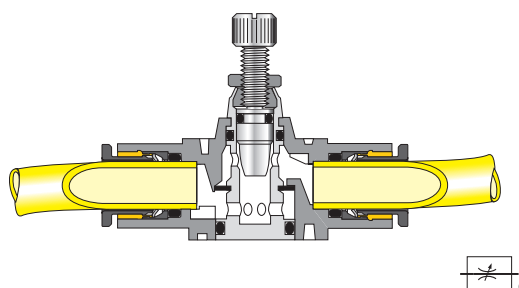

For instant visual identification, each Parker Legris flow control regulator version is identified by the related pneumatic symbol and by a letter:

- uni-directional regulation on exhaust: letter A
- uni-directional regulation on supply: letter B
- bi-directional regulation: letter C


Flow Characteristics (at 6 bar)

for Flow Control Regulators




7100
7101


7100

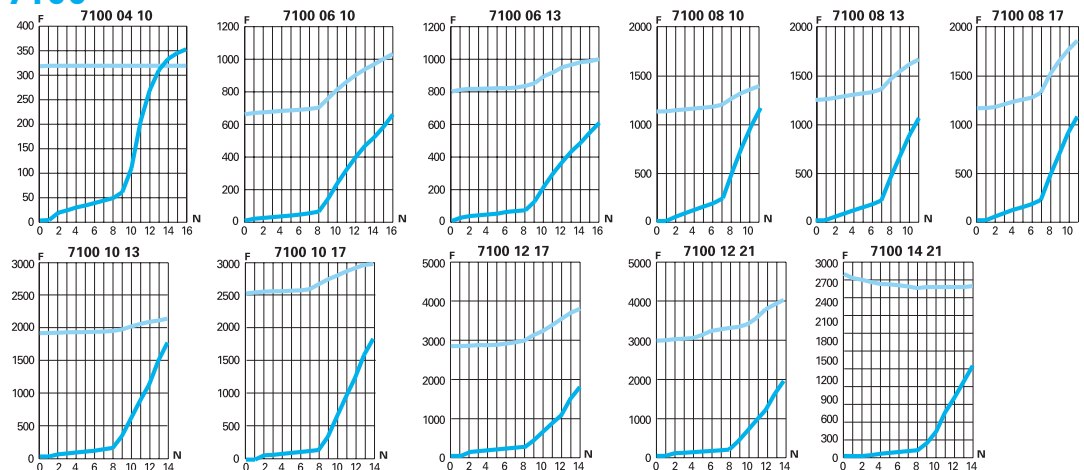

7101

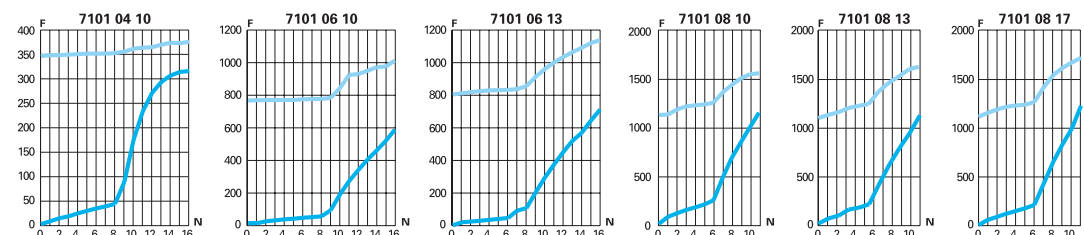

7680

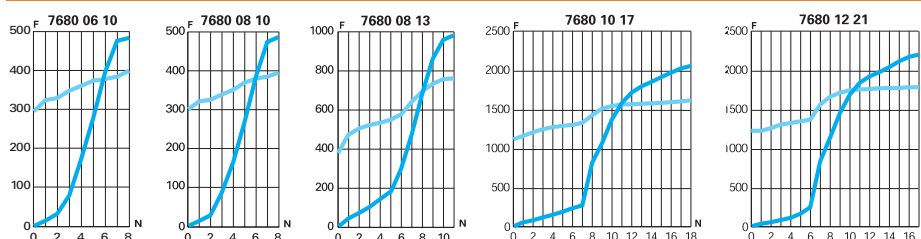

6 bar

 Direction of adjustment
 Return

F: Flow in Nl/min

N: Number of turns