
C6MK4 Swivel nut elbow

BSPP 60° cone end (ISO 8434-6) / BSPP 60° Female swivel end (ISO 8434-6)

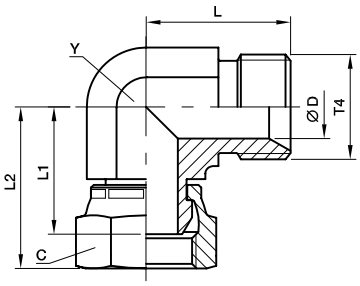

Thread BSPP T4	C mm	D mm	L mm	L1 mm	L2 mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/8-28	14	3.5	17	18	23	11	26	**2C6MK4S**	**2C6MK4SS**	350	350
1/4-19	19	4.7	24	25	31	14	62	**4C6MK4S**	**4C6MK4SS**	350	350
3/8-19	22	7.9	27	26	33	19	104	**6C6MK4S**	**6C6MK4SS**	350	350
1/2-14	27	11.1	32	32	39	22	159	**8C6MK4S**	**8C6MK4SS**	200	200
5/8-14	30	14.3	34	30	40	22	158	**10C6MK4S**	**10C6MK4SS**	200	200
3/4-14	32	16.7	36	33	42	27	226	**12C6MK4S**	**12C6MK4SS**	200	200
1-11	41	22.2	42	38	49	33	377	**16C6MK4S**	**16C6MK4SS**	120	120
1 1/4-11	50	28.6	48	48	58	41	650	**20C6MK4S**	**20C6MK4SS**	105	105
1 1/2-11	60	33.3	54	50	63	48	999	**24C6MK4S**	**24C6MK4SS**	105	105

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

O

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark